



Product Specifications **8.4V**


Powerex Precharged MH-84VP300

Industry Standard Dimensions




Typical Characteristics

CHARGE CHARACTERISTICS

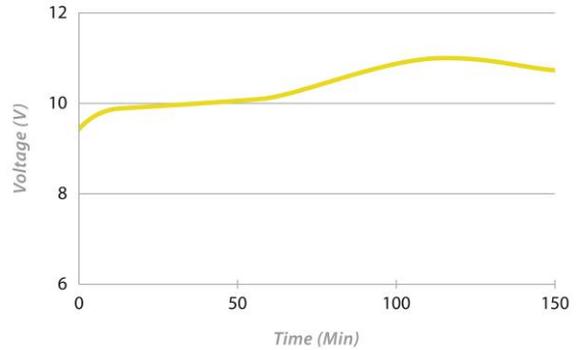

DISCHARGE CHARACTERISTICS

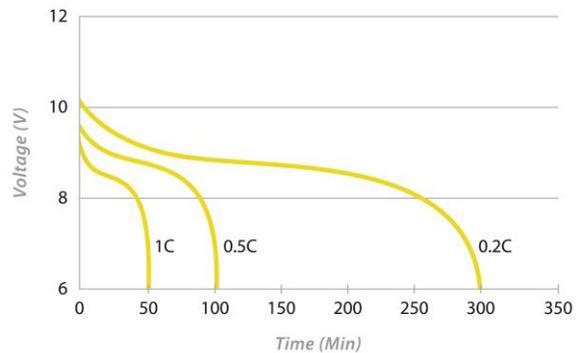

Specifications

Type:	Nickel-Metal Hydride (NiMH) Rechargeable Battery
Size:	9V
Nominal Voltage:	8.4 Volts
Rated Capacity¹:	300mAh
Minimum Capacity:	270mAh
Internal Impedance²:	~600mΩ
Weight:	~56.0 grams
Size:	17.0 (D) x 48.5 (H) mm

Operating and Storage Temperatures

Charge:	0 - 40°C
Discharge:	-20 - 60°C
Storage:	-20 - 50°C (<30 days)
	-20 - 40°C (<90 days)
	-20 - 30°C (<365 days)
Humidity:	65 ± 20%

This data is subject to change. Performance information is typical. Please Contact Maha Energy for more information.

1. Based on a 0.2C rate discharge to 7.0 volts
2. Internal Impedance measured after discharge at end voltage of 7.0 volts