






Product Specifications

Powerex Precharged MH-AAAP100 AAA

Industry Standard Dimensions

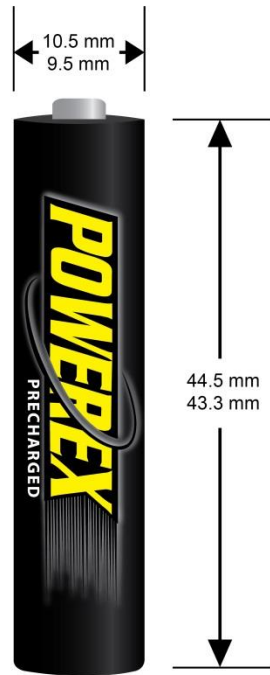

Typical Characteristics

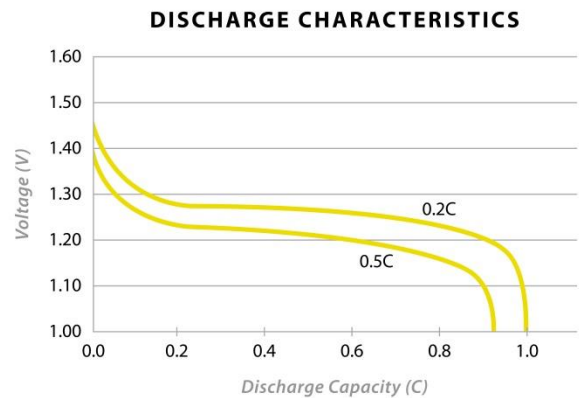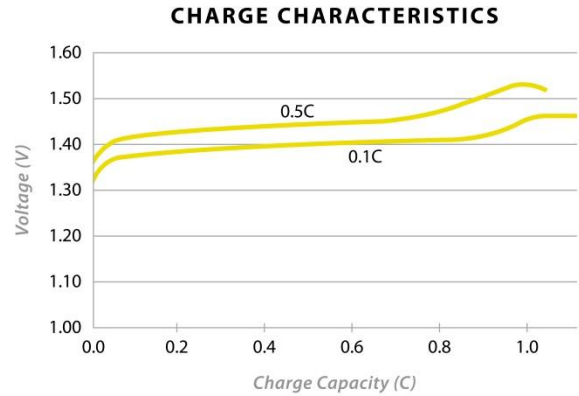

Specifications

Type:	Nickel-Metal Hydride (NiMH) Rechargeable Battery
Size:	AAA
Nominal Voltage:	1.2 Volts
Rated Capacity¹:	1000mAh
Minimum Capacity:	900mAh
Internal Impedance²:	~35mΩ
Weight:	13.0 grams
Size:	10.5 (D) x 44.5 (H) mm

Operating and Storage Temperatures

Charge:	0 - 45°C
Discharge:	-20 - 50°C
Storage:	-20 - 50°C (<30 days)
	-20 - 40°C (<90 days)
	-20 - 30°C (<365 days)
Humidity:	65 ± 20%

This data is subject to change. Performance information is typical. Please Contact Maha Energy for more information.

1. Based on a 0.2C rate discharge to 1.0 volts
2. Internal Impedance measured after discharge at end voltage of 1.0 volts